

Loudspeakers

W38 Sub

W38 SUB represents the maximum expression of SPL capability still mantaining HiFi quality reproduction in so compact size.

It is the result of extensive search on components, their careful coupling and mechanical design, in order to create a really exclusive sound system specifically designed for the "Fragment of Extinction" project. Its driver is the best in the HiFi market, with remarkable power handling and robustness. This project pushes the bass response down to 25Hz, with 115db SPL and very low distortion. In case of multiple units, its special side shape allows to follow circular hall boundaries keeping the loudspeakers very close to each other.




This speaker can be driven by a Powersoft® amplifier "ottocanali" or "quattrocanali" series, with dedicated presets.

	W38 Sub
Frequency response ± 3 db	25 ÷ 150 Hz
Efficiency (1W/mt)	93 db
Program power	2.000 W
SPL continuos (peak)	124 db (130db) 115db @ 25Hz
Impedance	4 ο 8 Ω
Coverage	360°
Drivers	1 x 15", 100mm coil, very long linear excursion woofer
Connections	1 x SpeakON® 2 wire
Dimensions	68W x 55H x 38P
Weight (Kg)	30



Loudspeakers

W38 Sub

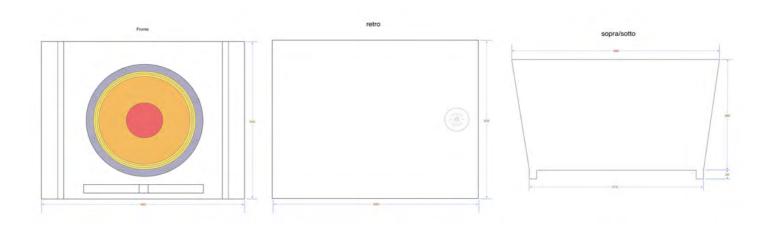

Data sheet v.1

Sonus Audio Services srl reserves the right to make modifications without prior note.

Sonus Audio Services srl

www.sonusaudioservices.it info@sonusaudioservices.it